


Flat grating SQUADRA 500 - Depth frame 100 mm - C250 class



AxB (mm)	CxC (mm)	O (mm)	H (mm)	E (mm)	e (mm)	Total Mass (kg)	Grating mass (kg)	Waterway area	Packaging	References
530x500	450x450	350	100	30	65	31.60	17.5	9.80 dm ²	10	ECSQ50LF

Width holes: 29 to 30 mm - Length holes: 126 to 128 mm

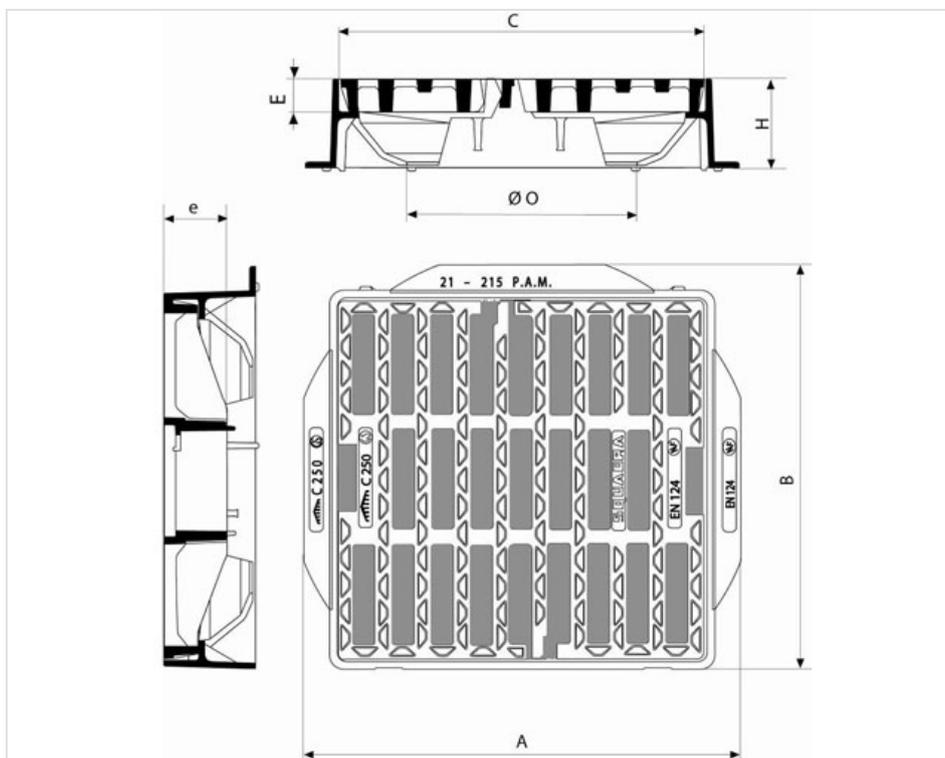

Material and coating:

- Frame and grating in Ductile Iron EN GJS 400-15: bituminous coating


Field of application:

- C250 class (Group 3) according to standard EN 124-2, destined to the circulated pavements and similar locations exposed to the access of vehicles.
- Omnidirectional punctual collection.

Main characteristics:

- Possible rotation of the grating of 90° in its frame
- Automatic locking by spring bar
- Simple assembly and fast disassembling
- Protection against theft, cannot be dismantled without tool
- Anti-skid surface designed to optimize water absorption
- Depth frame 100 mm adapted to a pavements environment
- [Implementation](#)

Linked products

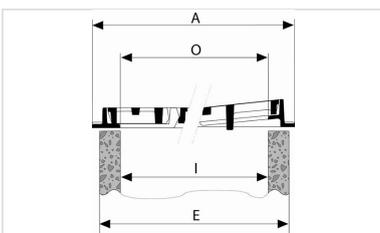

Grating SQUADRA C250 -
Implementation



Mudpan for Gratings
SQUADRA and DEDRA 400

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.